

ENDFEDZ EF-17
17M END FED DIPOLE

PARTS LIST

PART NO.	QTY	DESCRIPTION
SUB18001	1	17 METER EF MATCHBOX
1801	1	17M RADIATOR 25' 6"
1802	1	17M TUNING STUB
1403	1	END INSULATOR
14417	1	#10 SPLIT RING LOCKWASHER
2814	1	#10 STAINLESS HEX NUT
2815	2	#10 STAINLESS FLATWASHER
32767	1	SHIPPING BOX
1803	1	EF-17 MANUAL

ENDFEDZ ARE MONOBAND ANTENNAS. USE ON BANDS
OTHER THAN THE DESIGN BAND WILL RESULT IN
SIGNIFICANT RADIATION FROM THE COAX AND COULD
DESTROY THE MATCHBOX

FIG. 1



ASSEMBLY

1. This antenna is essentially a half wave dipole with one important difference– the feedline is at the end of the antenna. The antenna is suspended at its ends by the two included end insulators– one of which is integral to the matchbox.

2. In order to have the least possible influence on the antenna, insulated lines are recommended for attachment to the insulators. The antenna may be suspended horizontally, vertically or sloping. Portable operation is easily accomplished by suspending the far end from a tree limb and letting the matchbox hang just above the ground.

3. The antenna has been used from hotel rooms by hanging the matchbox end just outside the window and letting the far end hang, or preferably pulling it away from the building with a guy attached to the end insulator.

4. Tuning is best accomplished by using an antenna analyzer attached to the far end of the coaxial cable that will be used with the antenna. Once the initial resonant frequency is established, the antenna may be tuned just like a dipole. Shortening the far end by 1” will raise the resonant frequency approximately 50 KHz. If too much wire is removed, the included tuning stub may be attached to the 10-32 stud at the matchbox end and trimmed to establish resonance to the desired frequency (Fig.2). Fine tuning may be accomplished by changing the orientation of the stub with regard to the main radiator (I.e. rotating the stub and retightening the hardware. **Tighten the #10 hardware just enough to compress the lockwasher**

5. Once you are satisfied with the overall length of the radiator, lace the wire through all three holes in the insulator as shown in Fig. 1.

6. Fig. 3 illustrates some mounting ideas.



Fig. 1




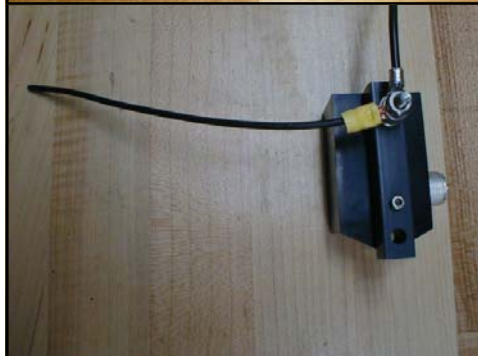


Fig. 2

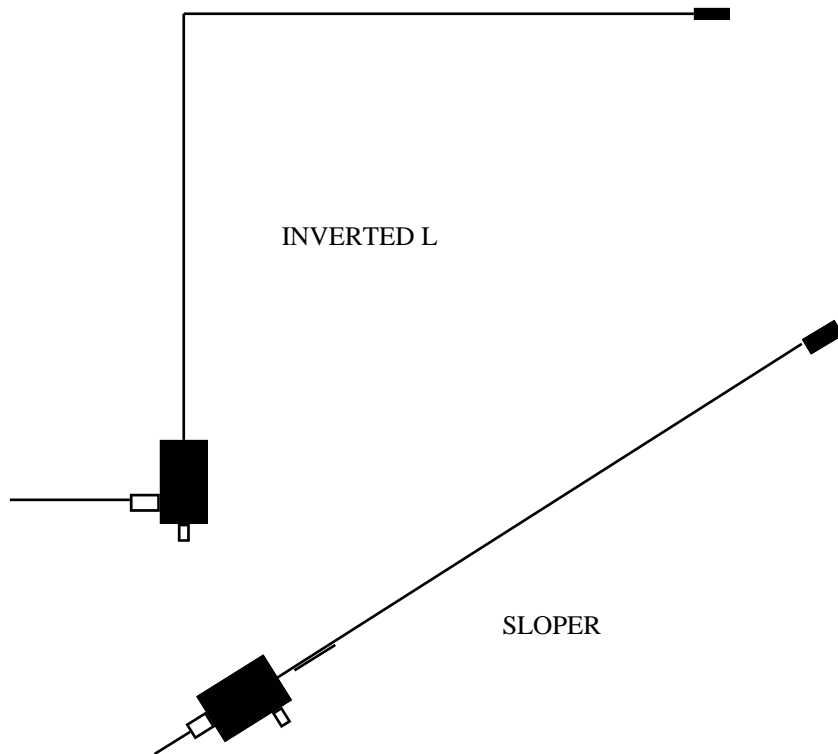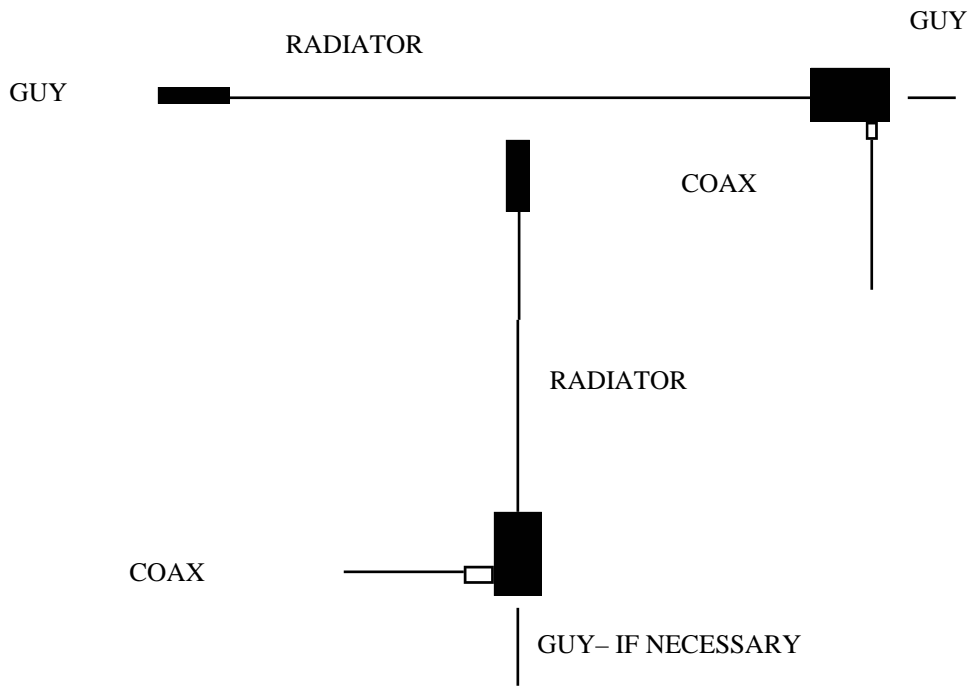

**EF-17
TYPICAL
V.S.W.R. PLOT**

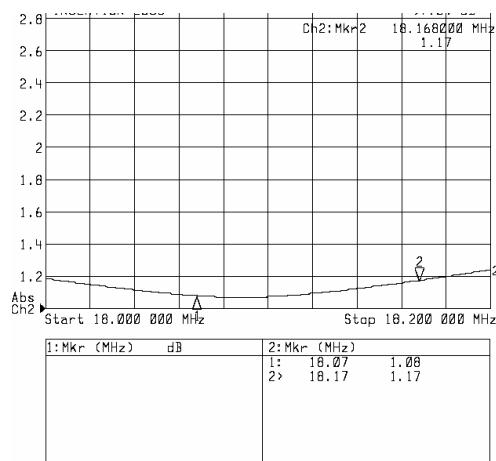

SPECIFICATIONS

Polarity:	Depends on mounting configuration
Design Z:	50 Ohms
V.S.W.R. Bandwidth:	400KHz 1.5:1
Power Handling:	100W
Weight:	0.5 lbs
Length:	25' 6"
Hardware:	Stainless Steel
Connector:	Silver/Teflon SO-239
Radiator:	#14 black poly coated Flex Weave

PAR ELECTRONICS
P.O. BOX 645
GLENVILLE, NC 28736
Voice: (828)743-1338
FAX (828)743-1219
E-Mail par@parelectronics.com